### **Product Description**

LEDSION Slim wall pack is available in two sizes for a variety of applications including building perimeter, entrances, stairways and security lighting. luminaries provides a low-profile architectural style with the power of bright, energy efficient LEDs. It has a rugged aluminum construction with multi-mount capabilities. 0° to +90° tilt adjustments. For a building that has a modern or futuristic look.



### **Advantage**

- UL DLC certificate.
- Lumiled Chip, high CRI.
- IP65 driver, input voltage 120-277VAC.
- Output constant current lever can be Adjusted through output cable with 1-10V.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.



### **Applications**


Security, pathway and perimeter lighting, Building entryways and walkways...




### **Specifications**

Model No.	LS-WP27WV3XXKYYYYY	LS-WP40WV3XXKYYYYY	
Input Power	27W	27W	
Lumen	3510 LM/W	5200 LM/W	
Lumen Efficacy	130 LM/W	130 LM/W	
Color Temperature	4000K, 4500K, 5000K, 5700K		
CRI	>70		
Viewing Angle	150*85 Degree(Type III)		
Input Voltage	120-277VAC 50/60Hz		
PF	≥0.9		
THD	≤20%		
Driver Brand	China brand driver		
Driver Model	MSPI-NIS25W20S-430	MSPI-NIS50W21S-640	
Optional Accessory	Photocell		
LED Brand	Lumileds		
LED Type	3030		
LED QTY	30 PCS	40 PCS	
Housing	Aluminum Alloy		
Housing Color	Black / Dark Bronze/ white		
Waterproof Rating	WET (IP65)		
Operating Temperature	-40℃ T	O 45℃	
Operating Humidity	20%-90% RH		
Storage Temperature	-40℃ T	O 80℃	
Storage Humidity	10%-95% RH		
Warranty Time	5 Years		

### **Photometrics**



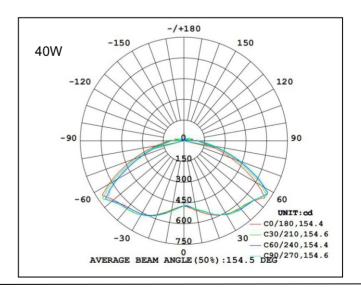

### **Projected LED Lumen Maintenance**


Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8


Data references the extrapolated performance projections for the WALLPACK LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


#### **Structure**



### **Dimensions**







Net Weight:

27W: 1.52kg(3.351lb) 40W: 1.80kg(3.968lb)

#### **Notice for User**

Please turn off power before install or change assembly parts.

The input voltage and lamps should be matched, after connecting the power line,

Please make sure the wiring section is insulated.

No-professionals, must not install and disassemble the lamps.

#### **After-sale Service**

The product refers to electrics knowledge. Please don't disassemble it by yourself.

If any quality problem happens, please contact the factory for warranty details.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are without notice.